



ExposedPad LQFP/TQFP Packages

Amkor's ExposedPad LQFP/TQFP family of power IC packages significantly increases the thermal efficiency of power constrained standard LQFP and TQFP packages. These packages can increase heat dissipation by as much as 110% over standard LQFP/TQFP packages, thereby expanding the margin of operating parameters. In addition, the ExposedPad can be connected to ground, thereby reducing loop inductance for high frequency applications. The ExposedPad should be soldered directly to the PCB to realize the thermal and electrical benefits. 3D packaging with die stack process are also provided in this package for MCP solution.

Applications

As increased end-application densities and shrinking product sizes demand more from IC packages, ExposedPad LQFP/TQFP packages give designers the needed margin for designing and producing high performing products. Applications such as magnetic/optical disk drives, pagers, wireless, CATV/RF modules, LCD/flat panel TVs, radio and telecom benefit from this package. GaAs and high-speed silicon technologies work especially well in ExposedPad LQFP/TQFP packages due to added shielding and grounding capabilities.

Features

- 5 x 5 mm to 28 x 28 mm body size
- 32-256 lead counts
- Broad selection of die pad sizes
- Double down-set ground bond ring pad
- Copper leadframes
- 1.0 mm body thickness for TQFP
- 1.4 mm body thickness for LQFP
- Custom leadframe design available
- ExposedPad is easily inverted for heat sink attach
- Low Profile – < 1.2 mm max mounted height
- Electrical – very low loop inductance with use of paddle as ground path, more pins available for signal and allows for operating frequencies of up to 2.4 GHz

ExposedPad LQFP/TQFP

Thermal Performance

Multi-layer PCB

Pkg	Body Size (mm)	Pad Size (mm)	ΘJA (°C/W) by Velocity (LFPM)		
			0	200	500
32 ld	5 x 5	3.4 x 3.4	34.6	29.1	27.2
48 ld	7 x 7	5 x 5	27.6	22.6	20.7
64 ld	10 x 10	7.5 x 7.5	22.3	17.2	15.1
100 ld	14 x 14	10.3 x 10.3	20.6	15.3	13.4
144 ld	20 x 20	7 x 7	20.0	15.4	13.5
176 ld*	24 x 24	10 x 10	19.0	15.4	13.5
208 ld*	28 x 28	11 x 11	18.7	15.5	14.0

*Estimates

JEDEC Standard Test Boards

Tested @ 1W with die attach pad soldered to PCB

Electrical Performance

Pkg	Body Size (mm)	Pad Size (mm)	Loop Inductance (nH)	
			Center	Corner
32 ld	5 x 5	3.4 x 3.4	1.97	2.38
48 ld	7 x 7	5 x 5	2.29	2.81
64 ld	10 x 10	7.5 x 7.5	3.04	3.78
100 ld	14 x 14	10.3 x 10.3	2.57	3.32
144 ld	20 x 20	7 x 7	4.00	5.00
176 ld	24 x 24	10 x 10	5.00	6.00
208 ld	28 x 28	11 x 11	6.00	7.00

JEDEC Standard Test Boards

Tested @ 1W with die attach pad soldered to PCB

Reliability Qualification

Amkor devices are assembled in optimized package designs with proven reliable semiconductor materials.

- Moisture Sensitivity Characterization JEDEC Level 3, 30°C/60% RH, 192 hrs
3x reflow – SAT
- HAST w/precon 130°C/85% RH, 96 hours
- Temp Cycle w/precon -65°C/+150°C, 1000 cycles
- Temp/Humidity 85°C/85% RH, 1000 hours
- High Temp Storage 150°C, 1000 hours

Visit Amkor Technology online for locations and to view the most current product information.

ExposedPad LQFP/TQFP

Process Highlights

- Die thickness 11.5 ± 0.5 mils for TQFP
14.5 ± 0.5 mils for LQFP
- Bond pad pitch 0.050 mm
- Wire diameter 0.8 mil standard
- Lead finish 100% matte Sn standard
Pre-plated leadframe capa is selectively available
- Marking Laser
- Pack/ship options Bar code, dry pack
- Wafer backgrinding Available


Test Services

- Program generation/conversion
- Product engineering
- Wafer sort
- 256 pin x 20 MHz test system available
- -55°C to +165°C test available
- Burn-in capabilities
- Tape and reel services

Shipping

- JEDEC outline CS-007 low profile tray

Cross-sections ExposedPad LQFP/TQFP

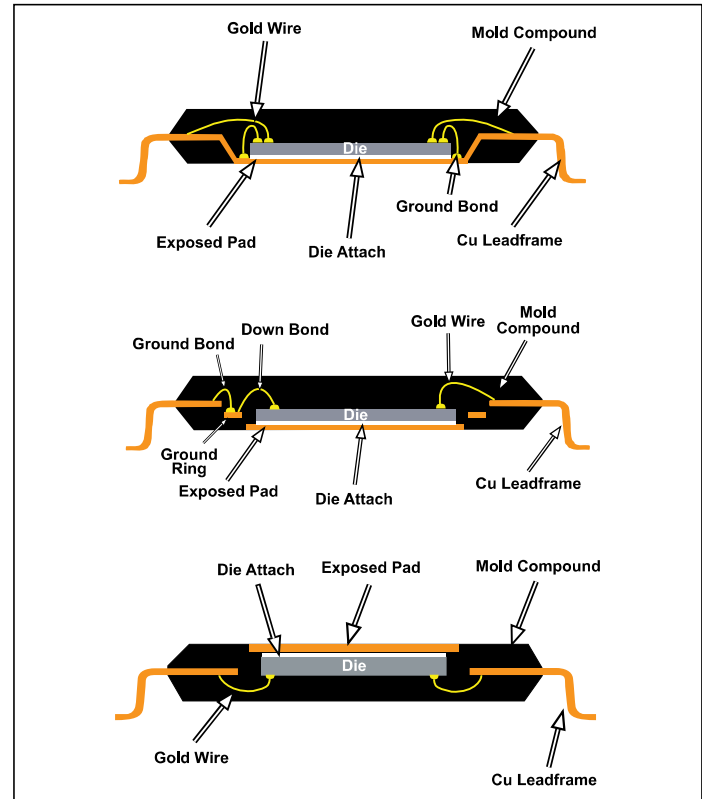

Configuration Options

ExposedPad LQFP/TQFP Nominal Package Dimensions (mm)

Lead Count	Body Size	Body Thickness	Lead Form	Standoff	Foot Length	Tip-to-Tip	Tray Matrix	Units Per Tray
32	5 x 5	1.00	1.00	0.10	0.60	7.0	12 x 30	360
32/48/64	7 x 7	1.00	1.00	0.10	0.60	9.0	10 x 25	250
44/52/64/80	10 x 10	1.0 / 1.4	1.00	0.10	0.60	12.0	8 x 20	160
80	12 x 12	1.0 / 1.4	1.00	0.10	0.60	14.0	7 x 17	119
52/64/80/100/120/128	14 x 14	1.0 / 1.4	1.00	0.10	0.60	16.0	6 x 15	90
144	16 x 16	1.00	1.00	0.10	0.60	18.0	6 x 15	90
100/128	14 x 20	1.40	1.00	0.10	0.60	16.0 x 22.0	6 x 12	72
128/144/176	20 x 20	1.0 / 1.4	1.00	0.10	0.60	22.0	5 x 12	60
160/176/216	24 x 24	1.40	1.00	0.10	0.60	26.0	4 x 10	40
208/256	28 x 28	1.40	1.00	0.10	0.60	30.0	4 x 9	36

Visit [Amkor Technology](http://www.amkor.com) online for locations and to view the most current product information.



With respect to the information in this document, Amkor makes no guarantee or warranty of its accuracy or that the use of such information will not infringe upon the intellectual rights of third parties. Amkor shall not be responsible for any loss or damage of whatever nature resulting from the use of, or reliance upon it and no patent or other license is implied hereby. This document does not in any way extend or modify Amkor's warranty on any product beyond that set forth in its standard terms and conditions of sale. Amkor reserves the right to make changes in its product and specifications at any time and without notice. © 2013, Amkor Technology Incorporated. All Rights Reserved.